


Standard F&D Head

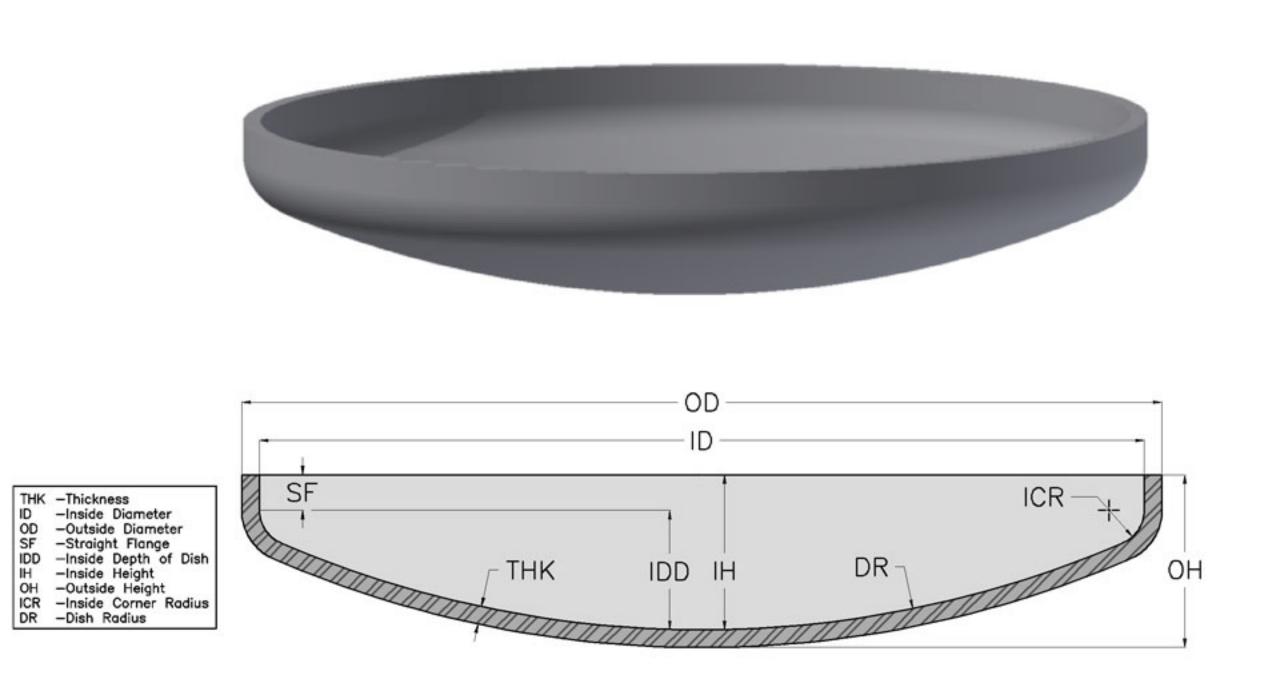

Diameter Range 10.75" through 253"

Thickness Range 0.25" through 5"

Heads outside the ranges can be produced segmentally. Please consult our sales department.